




车载用变压器 Transformer For Automobile

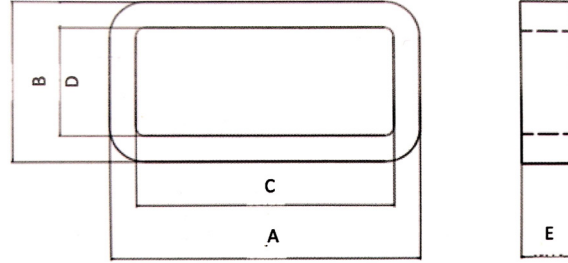

规格 Specifications:

牌号 Part Number	铁芯尺寸 Core dimensions					成品铁芯尺寸 Finished core size					截面积 iron cross section A _{Fe} cm ²	平均磁路长度 mean path length l _{Fe} cm	重量 weight m _{Fe} g	磁导率 Permeability (μ at 10kHz)		单匝电感量 A _L 10 kHz nominal Mh
	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)				指定范围值 specified value	设计参考值 design refer	
TSNC-0778-L-b	72.5	44.5	58.5	30.5	15.0	77.5	49.5	53.5	25.5	18.5	0.82	17.3	105.0	50000 $\leq \mu'$ ≤ 97000	$\mu=80000$	48
TSNC-0779-L-b-01														17850 $\leq \mu'$ ≤ 34500	$\mu=30000$	18
TSNC-0780-L-b-02														11000 $\leq \mu'$ ≤ 23000	$\mu=20000$	12
TSNC-0781-L-b-03														2800 $\leq \mu'$ ≤ 5400 (100kHz)	$\mu=4500$	2.7
TSNC-0800-L-b	88.8	53.3	68.0	32.5	15.0	94.0	58.5	63.0	27.5	18.8	1.24	20.5	187.0	17850 $\leq \mu'$ ≤ 34500	$\mu=30000$	22
TSNC-0535-L-b	92.9	41.0	80.9	29.0	15.0	96.8	45.0	76.8	25.0	18.0	0.70	21.3	110.0	50000 $\leq \mu'$ ≤ 97000	$\mu=80000$	28
TSNC-0598-L-b	108.8	41.6	96.7	29.4	12.0	113.2	46.0	91.2	24.0	16.0	0.57	25.8	109.0	45000 $\leq \mu'$ ≤ 95000	$\mu=80000$	18

1. 可根据客户要求，设计制作其他规格磁芯尺寸，采用不同磁导率材料
1. Welcome other specification concerning customer's demand of dimensions and performance.
2. 可根据客户要求，选用不同耐温等级的护盒材料，例如 PBT (130℃)，FR52G30(140℃)，FR530(155℃)，PPS (180℃) 等
2. Welcome other specification concerning customer's requirements of different case material, e.g. PBT (130℃)，FR52G30(140℃)，FR530(155℃)，PPS (180℃) .
3. 可根据客户要求，调整外壳安装孔位置
3. Welcome other specification concerning customer's demand of adjusting the location of mounting hole of the case.

